


PUNZÓN CABEZA CILÍNDRICA ISO 8020 FORMA MTB

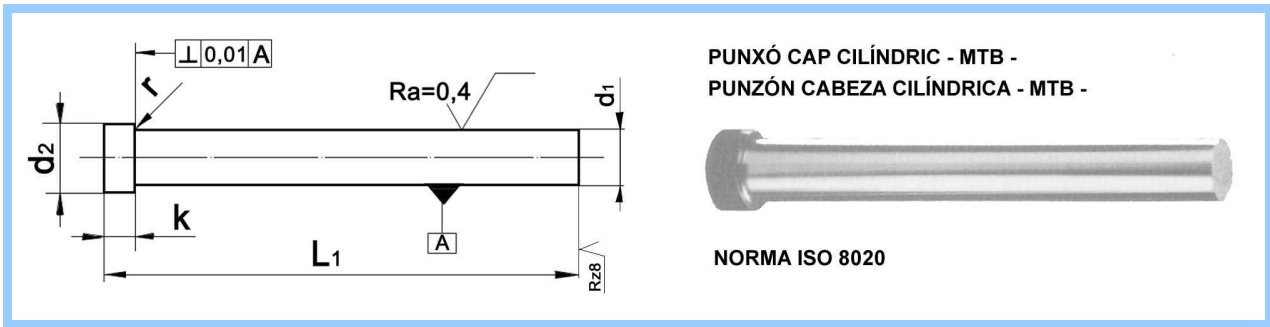

MATERIAL :

A-2 Acero 1.2363 (F-522)
M-2 Acero Rápido HSS. 1.3343

DUREZAS :

Vástago 60-63 HRc. Cabeza 40±5 HRc.
Vástago 60-63 HRc. Cabeza 50±5 HRc.

EJECUCIÓN. TEMPLADOS REVENIDOS Y RECTIFICADOS. CABEZA ESTAMPADA EN CALIENTE.

d ₁ m-5	d ₂ 0/-0.25	k +0.1/+0.25	r ±0.1	L ₁ + 1						
				50	56	63	71	80	90	100
3.0	5.0	3.0	0.3							
4.0	7.0	5.0	0.3							
5.0	8.0	5.0	0.3							
6.0	9.0	5.0	0.3							
8.0	11.0	5.0	0.3							
10.0	13.0	5.0	0.3							
13.0	16.0	5.0	0.4							
16.0	19.0	5.0	0.4							
20.0	23.0	5.0	0.4							
25.0	28.0	5.0	0.4							
32.0	35.0	5.0	0.4							

TRATAMIENTOS SUPERFICIALES TIN, TIN-C, ETC. ACONSEJABLE SOBRE PUNZONES CALIDAD M-2.

STOCK HABITUAL EN FÁBRICA, CONSULTAR PLAZOS DE ENTREGA.

BAJO DEMANDA OTROS DIÁMETROS Y LONGITUDES.

