


Carga Extra Fuerte
Muelles para troquel


Color Amarillo
Código de color según ISO

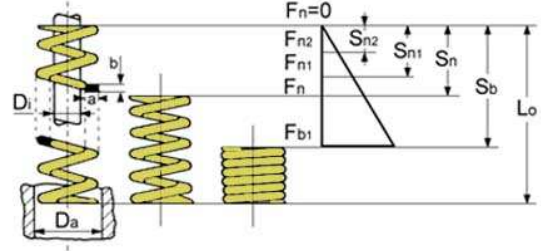

Da mm.	Di mm.	Lo mm.	Nº de referencia para pedido	Carga a... 15% de Deflexión		Carga a... 17% de Deflexión		Carga a... 20% de Deflexión		Carga a 1 mm. Deflex. (N)	Carga y deflexión aprox.. Altura compacta	
				N	mm	N	mm	N	mm		N	mm
10	5	25	XH-100	138.0	3.8	156.4	4.3	184.0	5.0	36.8	228.2	6.2
		32	HX-100-A	133.9	4.8	151.8	5.4	178.6	6.4	27.9	223.2	8.0
		38	XH-101	135.1	5.7	153.1	6.5	180.1	7.6	23.7	225.2	9.5
		44	XH-101-A	126.7	6.6	143.6	7.5	169.0	8.8	19.2	211.2	11.0
		51	XH-102	126.2	7.7	143.1	8.7	168.3	10.2	16.5	214.5	13.0
		64	HX-103	126.7	9.6	143.6	10.9	169.0	12.8	13.2	211.1	16.0
		76	XH-104	124.3	11.4	140.8	12.9	165.7	15.2	10.9	207.1	19.0
305	XH-105	119.0	45.8	134.8	51.9	158.6	61.0	2.6	197.6	76.0		
12.5	6.3	25	XH-110	219.4	3.8	248.6	4.3	292.5	5.0	58.5	362.7	6.2
		32	XH-110-A	210.7	4.8	238.8	5.4	281.0	6.4	43.9	351.3	8.0
		38	XH-111	205.2	5.7	232.6	6.5	273.6	7.6	36.0	342.0	9.5
		44	XH-111-A	200.0	6.6	226.6	7.5	266.6	8.8	30.3	333.3	11.0
		51	XH-112	200.4	7.7	227.2	8.7	267.2	10.2	26.2	340.6	13.0
		64	XH-113	203.5	9.6	230.7	10.9	271.4	12.8	21.2	339.2	16.0
		76	XH-114	194.9	11.4	220.9	12.9	259.9	15.2	17.1	324.9	19.0
89	XH-115	193.6	13.4	219.4	15.1	258.1	17.8	14.5	319.0	22.0		
305	XH-116	196.7	45.8	223.0	51.9	262.3	61.0	4.3	326.8	76.0		
16	8	25	XH-120	442.5	3.8	501.5	4.3	590.0	5.0	118.0	731.5	6.2
		32	XH-120-A	427.2	4.8	484.2	5.4	569.5	6.4	89.0	712.0	8.0
		38	XH-121	411.0	5.7	465.8	6.5	548.0	7.6	72.1	685.0	9.5
		44	XH-121-A	401.9	6.6	455.5	7.5	535.9	8.8	60.9	669.9	11.0
		51	XH-122	400.1	7.7	453.4	8.7	533.5	10.2	52.3	679.9	13.0
		64	XH-123	395.5	9.6	448.3	10.9	527.4	12.8	41.2	659.2	16.0
		76	XH-124	388.7	11.4	440.6	12.9	518.3	15.2	34.1	647.9	19.0
89	XH-125	393.8	13.4	446.3	15.1	525.1	17.8	29.5	649.0	22.0		
102	XH-126	391.7	15.3	443.9	17.3	522.2	20.4	25.6	665.5	26.0		
305	XH-127	384.3	45.8	435.5	51.9	512.4	61.0	8.4	638.4	76.0		
20	10	25	XH-1	1098.8	3.8	1245.3	4.3	1465.0	5.0	293.0	1816.8	6.2
		32	XH-1-A	1075.2	4.8	1218.6	5.4	1433.6	6.4	224.0	1792.0	8.0
		38	XH-2	1008.9	5.7	1143.4	6.5	1345.2	7.6	177.0	1681.5	9.5
		44	XH-2-A	983.4	6.6	1114.5	7.5	1311.2	8.8	149.0	1639.0	11.0
		51	XH-3	979.2	7.7	1109.8	8.7	1305.6	10.2	128.0	1664.0	13.0
		64	XH-4	950.4	9.6	1077.1	10.9	1267.2	12.8	99.0	1584.0	16.0
		76	XH-5	931.4	11.4	1055.6	12.9	1241.8	15.2	81.7	1552.3	19.0
		89	XH-6	927.8	13.4	1051.5	15.1	1237.1	17.8	69.5	1529.0	22.0
		102	XH-7	927.2	15.3	1050.8	17.3	1236.2	20.4	60.6	1575.6	26.0
		115	XH-8	914.3	17.3	1036.2	19.6	1219.0	23.0	53.0	1536.0	29.0
		127	XH-9	904.9	19.1	1025.5	21.6	1205.6	25.4	47.5	1520.0	32.0
		139	XH-10	896.6	20.9	1016.1	23.6	1195.4	27.8	43.0	1505.0	35.0
		152	XH-11	889.2	22.8	1007.8	25.8	1185.6	30.4	39.0	1482.0	38.0
305	XH-12	969.9	45.8	1099.2	51.9	1293.2	61.0	21.2	1611.2	76.0		
25	12.5	32	XH-13-A	1797.1	4.8	2936.7	5.4	2396.2	6.4	374.7	2995.2	8.0
		38	XH-13	1972.2	5.7	2235.2	6.5	2629.2	7.6	346.0	3287.0	9.5
		44	XH-14-A	1610.4	6.6	1825.1	7.5	2147.2	8.8	244.0	2684.0	11.0
		51	XH-14	1587.4	7.7	1799.0	8.7	2116.5	10.2	207.5	2697.5	13.0
		64	XH-15	1545.6	9.6	1751.7	10.9	2060.8	12.8	161.0	2576.0	16.0
		76	XH-16	1491.1	11.4	1689.9	12.9	1988.2	15.2	130.8	2485.2	19.0
		89	XH-17	1475.2	13.4	1671.9	15.1	1966.9	17.8	110.5	2431.0	22.0
		102	XH-18	1473.4	15.3	1669.8	17.3	1964.5	20.4	96.3	2503.8	26.0
		115	XH-19	1478.3	17.3	1675.4	19.6	1971.1	23.0	85.7	2485.3	29.0
		127	XH-20	1453.5	19.1	1647.3	21.6	1938.0	25.4	76.3	2441.6	32.0
		152	XH-21	1447.8	22.8	1640.8	25.8	1930.0	30.4	63.5	2413.0	38.0
		178	XH-21-A	1439.1	26.7	1631.0	30.3	1918.6	35.6	53.9	2371.6	44.0
		203	XH-22	1431.2	30.5	1622.0	34.5	1908.2	40.6	47.0	2397.0	51.0
305	XH-22-A	1413.7	45.8	1602.2	51.9	1884.9	61.0	30.9	2348.4	76.0		

Carga Extra Fuerte
Muelles para troquel

Color Amarillo
Código de color según ISO

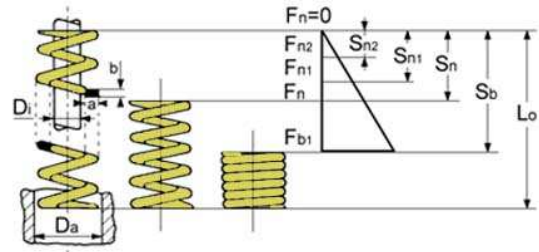

Da mm.	Di mm.	Lo mm.	Nº de referencia para pedido	Carga a... 15% de Deflexión		Carga a... 17% de Deflexión		Carga a... 20% de Deflexión		Carga a 1 mm. Deflex. (N)	Carga y deflexión aprox.. Altura compacta	
				N	mm	N	mm	N	mm		N	mm
32	16	38	XH-36	3010.7	5.7	3412.2	6.5	4014.3	7.6	528.2	5017.9	9.5
		44	XH-36-A	2801.0	6.6	3174.5	7.5	3734.7	8.8	424.4	4668.4	11.0
		51	XH-37	2700.5	7.7	3060.5	8.7	3600.6	10.2	353.0	4589.0	13.0
		64	XH-38	2584.3	9.6	2928.9	10.9	3445.8	12.8	269.2	4307.2	16.0
		76	XH-39	2490.9	11.4	2823.0	12.9	3321.2	15.2	218.5	4151.5	19.0
		89	XH-40	2407.0	13.4	2727.9	15.1	3209.3	17.8	180.3	3966.6	22.0
		102	XH-41	2371.5	15.3	2687.7	17.3	3162.0	20.4	155.0	4030.0	26.0
		115	XH-42	2415.0	17.3	2737.0	19.6	3220.0	23.0	140.0	4060.0	29.0
		127	XH-43	2362.2	19.1	2677.2	21.6	3149.6	25.4	124.0	3968.0	32.0
		152	XH-45	2325.6	22.8	2635.7	25.8	3100.8	30.4	102.0	3876.0	38.0
		178	XH-46	2354.9	26.7	2668.9	30.3	3139.9	35.6	88.2	3880.9	44.0
		203	XH-47	2314.2	30.5	2622.8	34.5	3085.6	40.6	76.0	3876.0	51.0
254	XH-48	2316.5	38.1	2625.3	43.2	3088.6	50.8	60.8	3891.2	64.0		
305	XH-48-A	2241.8	45.8	2540.7	51.9	2989.0	61.0	49.0	3724.0	76.0		
40	20	51	XH-49	4804.2	7.7	5444.8	8.7	6405.6	10.2	628.0	8164.0	13.0
		64	XH-50	4675.2	0.6	5298.6	10.9	6233.6	12.8	487.0	7792.0	16.0
		76	XH-51	4320.6	11.4	4897.6	12.9	5760.8	15.2	379.0	7201.0	19.0
		89	XH-52	4285.4	13.4	4856.7	15.1	5713.8	17.8	321.0	7062.0	22.0
		102	XH-53	4299.3	15.3	4872.5	17.3	5732.4	20.4	281.0	7306.0	26.0
		115	XH-54	4226.3	17.3	4789.8	19.6	5635.0	23.0	245.0	7105.0	29.0
		127	XH-55	4210.1	19.1	4771.0	21.6	5613.4	25.4	221.0	7072.0	32.0
		152	XH-56	3830.4	22.8	4341.1	25.8	5107.2	30.4	168.0	6384.0	38.0
		203	XH-57	4019.4	30.5	4553.3	34.5	5359.5	40.6	132.0	6732.0	51.0
		254	XH-58	4076.7	38.1	4620.3	43.2	5435.6	50.8	107.0	6848.0	64.0
305	XH-58-A	4016.9	45.8	4552.4	51.9	5355.8	61.0	87.8	6672.8	76.0		
50	25	64	XH-70	6806.4	9.6	7713.9	10.9	9075.2	12.8	709.0	11344.0	16.0
		76	XH-71	6520.8	11.4	7390.2	12.9	8694.4	15.2	572.0	10868.0	19.0
		89	XH-72	6341.3	13.4	7186.8	15.1	8455.0	17.8	475.0	10450.0	22.0
		102	XH-73	6196.5	15.3	7022.7	17.3	8262.0	20.4	405.0	10530.0	26.0
		115	XH-74	6072.0	17.3	6881.6	19.6	8096.0	23.0	352.0	10208.0	29.0
		127	XH-75	6019.8	19.1	6822.4	21.6	8026.4	25.4	316.0	10112.0	32.0
		152	XH-77	5449.2	22.8	6175.8	25.8	7265.6	30.4	239.0	9082.9	38.0
		203	XH-80	5694.2	30.5	6453.4	34.5	7592.2	40.6	187.0	9537.0	51.0
		254	XH-82	5829.3	38.1	6606.5	43.2	7772.2	50.8	153.0	9792.0	64.0
305	XH-83	59810.3	45.8	6585.0	51.9	7747.0	61.0	127.0	9652.0	76.0		